

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 12 TOWNSHIP 14 RANGE 3

DATE: 7-31-04

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County: 11-23-99



IN. S.P.C. E ZONE NAD '83

NAME: 14031202

N: 491991.9135(m)

E: 58620.9408(m)

Edgewood Ave 6000 S

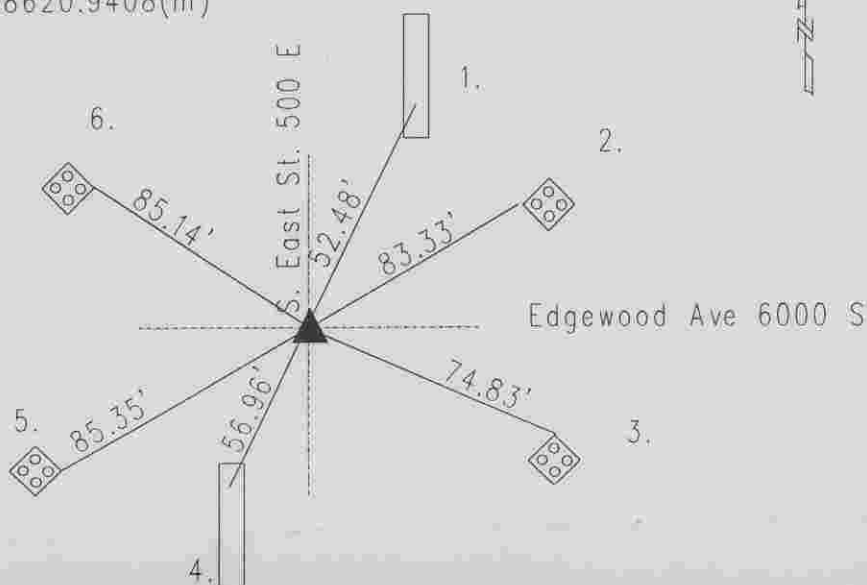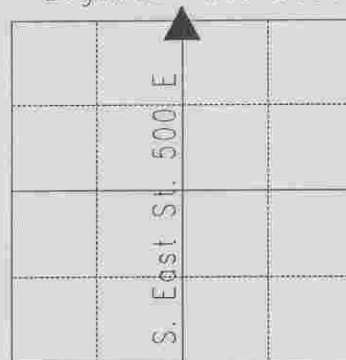

Corner originally set as a post in 1820 by Wm. B. Laughlin with the following witnesses: 14" elm bearing north 74 degrees, thence east 10 links, and a 3" sugar bearing south 10 degrees, thence west 21 links. (M.C. Atlas p. 5) A survey by D.B. Hasbrook on April 4, 1854 indicates no stone but the following witnesses: 20" hackberry bearing south 18 degrees, thence east 50 links, and a 18" walnut bearing north 49 degrees, thence east 67 links. (Perry Legal Book p. 28) A survey by R. Mayhew on January 4, 1857 indicates a stone with no witnesses. (Perry Legal Book p. 34) A survey by H.W. Klausmann on March 6, 1905 indicates the stone. (Perry Legal Book p. 65) Corner referenced by Burres on 10/13/48 and called a copper plug. Corner referenced by Miller on 9/24/75 and no marker was set. Corner was referenced by Miller on 9/7/76 and no marker was set. Corner was referenced by Greene on 2/27/87 and no marker was set. Corner was referenced by Wilcoxon on 4/5/93 and called a p.k. Nail with washer. Corner referenced by Wilcoxon on 11/23/99 and called a p.k. Nail with washer. Corner excavated by Wilcoxon on 7/13/04 and no points were found. The corner was set in position using ties and GPS coordinates. A # 205 cast iron Harrison Monument was in position as the corner.

14031202

REF.	DISTANCE	DESCRIPTION
1.	52.48'	Cut 'x' S-end of concrete median
2.	83.33'	Cut 'x' W-corner of aluminum pole base
3.	74.83'	Cut 'x' N corner of aluminum pole base
4.	56.96'	Cut 'x' N-end of concrete median
5.	85.35'	Cut 'x' E corner of aluminum pole base
6.	85.14'	Cut 'x' E corner of aluminum pole base